


WINDOW LIMITING STAYS

Aluminium surface fixed, friction window stays.
Cylindrical aluminium body with adjustable nylon friction collar on plated steel arm. Grey nylon end brackets, with one end releaseable by rotating knob.

Available in two sizes:

Code: WB1601,SA 220mm allowing extension to 315mm

Code: WB1602,SA 340mm allowing extension to 540mm

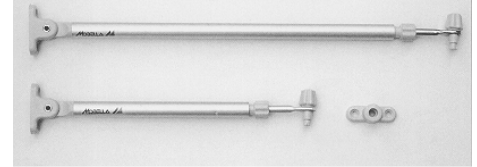

Stainless steel window friction limiting stay for installation within the rebate of "Stormproof" style timber windows.
Adjustable nylon friction shoe, sliding in stainless steel channel. Non releaseable.

268mm long, 18mm wide, 13mm stack height.

Code: WB1610,SS



Surface fixed window limiting stay, for use on timber side hung, top hung or pivoted windows.
Designed to restrict the opening of windows as a child safety and general security fitting.
The limiting stay may be released, with a key provided, to allow the window to open fully. Pressed steel fabrication, finished with white epoxy coating.

Code: WB1710,WE Timber windows

Surface fixed window limiting stay, similar to the above, but for use on steel and uPVC window constructions.
Pressed steel fabrication, finished with white epoxy coating.

Code: WB1720,WE Metal windows.

